

**Silentia** • 200 Series for thick doors  
• 94° opening • 0 protrusion

**Technical features**

**Integrated soft close by means of twin fluid dampers**



- Adjustment switch to set a comfortable soft close action
- Impervious to temperature extremes
- Very smooth opening with minimal resistance
- Patented compensating parallel side adjustment
- Available in all Salice fixing types (Screw, Dowel, Rapido, Logica)
- Available in Nickel or Titanium finish
- Exceeds ANSI/BHMA standards A156.9-2020

Constant “L” value of 1.5 mm (it does not change during side adjustment).

The number of hinges required depends on the size, weight and material of the door.

**The distance between the top and bottom hinge must be greater than the width of the door.**

Additional hinges should be added if doors are near the border of the line of size or weight chart. Use the diagram below to determine the number of hinges.

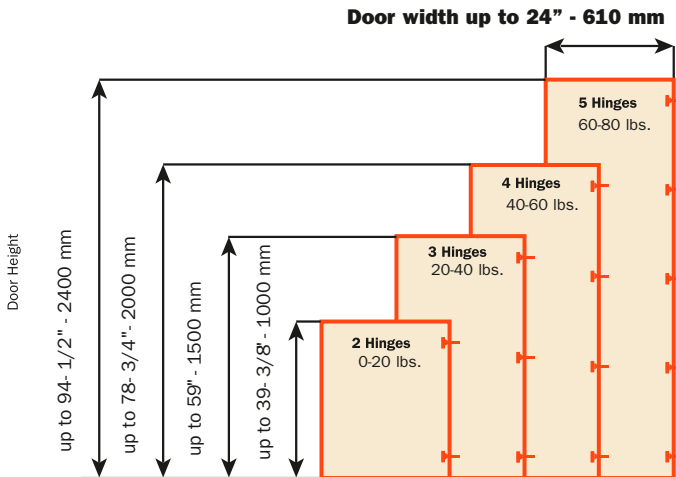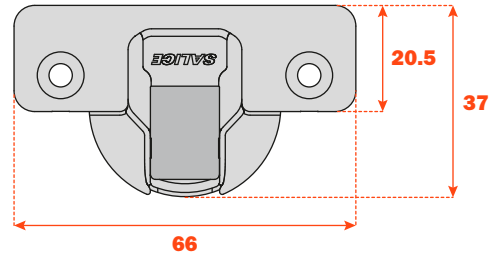

**Adjustments**

Compensating (parallel) side adjustment from -1.5 mm to +4.5 mm.  
Height adjustment ±2 mm.  
Depth adjustment with Domi snap-on mounting plates from -0.5 mm to +2.8 mm.  
Depth adjustment with 200 Series mounting plates +2.8 mm.

**Mounting plates**

Snap-on assembly on Domi mounting plates.  
Symmetrical and asymmetrical bright nickel plated steel or die-cast 200 Series mounting plates

**Note: Use No. 2 Pozi drive screwdrivers for all screws.**